

ISM 5V PROFILE



PANEL DETAILS

AVAILABLE WIDTHS

20.5", 24"

OPTIMAL PANEL WIDTHS

20.5", 24"


SUBSTRATES AVAILABLE

- Painted Galvalume® - 24ga and 26ga
- Galvalume™ - 24ga and 26ga
- Aluminum - .032"

IDEAL APPLICATION


ARCHITECTURAL, COMMERCIAL & RESIDENTIAL

Our ISM 5V profile offers a genuine "Key West" look and is highly valued for its combination of style and functionality. The 24-inch panel span, $\frac{3}{8}$ -inch rib height, and exposed fastener design all contribute to a sturdy and attractive finish that can withstand severe weather conditions for years to come.

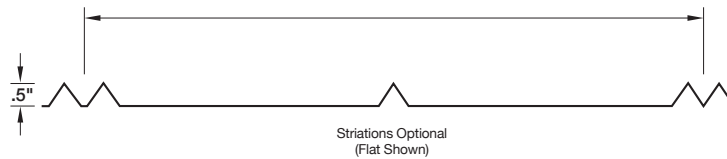


ISM 5V PROFILE

PROFILE



PANEL RIB OPTIONS



Flat Panel

Available in Flat or Striated

PRODUCT INFORMATION

FINISHES

Available in a wide variety of coatings and colors. See the ISM color charts for standard colors and paint specifications.

PANEL RIB

Factory made or field rolled to exact lengths

- Flat Panel
- Striations

INSTALLATION

Can be installed over plywood decking ($1\frac{1}{2}$ " Minimum) with approved underlayments.

TESTING

- TAS 100
- UL 580 Wind Uplift (Class 90)

Testing in accordance with



WARRANTY

35 YEAR WARRANTY - GALVALUME AND ALUMINUM

SUBSTRATES 35 year non Pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

25 YEAR WARRANTY - GALVALUME SUBSTRATE

Mill finished Galvalume with a two-sided, clear acrylic finish.